




Drafting Chair Assembly



2 People Recommended




Holds up to 300 lb (136 kg)







x1












x4




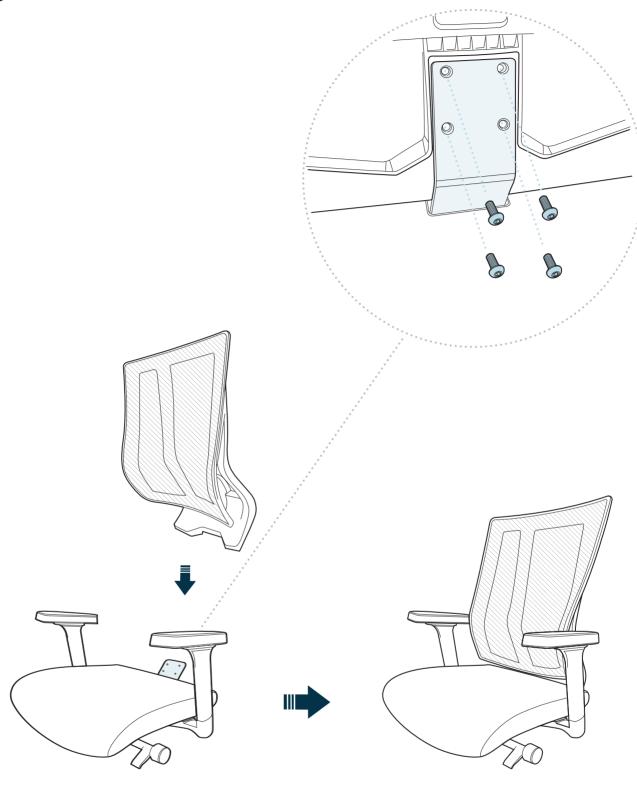

Remove the chair back, chair seat, hex bolts, Allen key, foot ring, air piston, and base from the box.


Align the back of the chair with the steel plate attached to the seat. Using the four bolts provided, fasten the plate to the back of the chair with the provided Allen key.



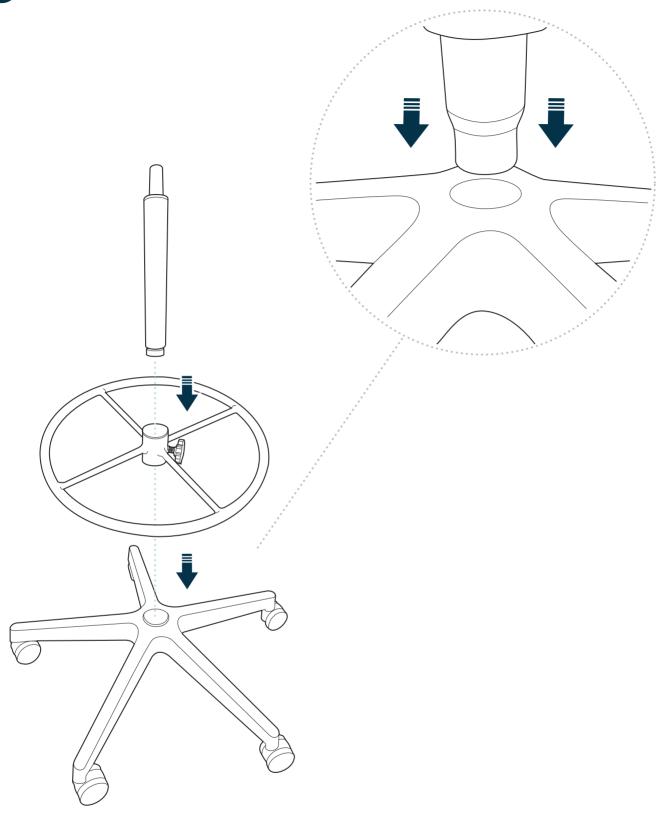

With the large end down, insert the piston through the foot ring (holes facing down) and into the base. With the piston firmly in place, slide the foot ring to the desired position, and turn the attached knob to the right to secure it in place.




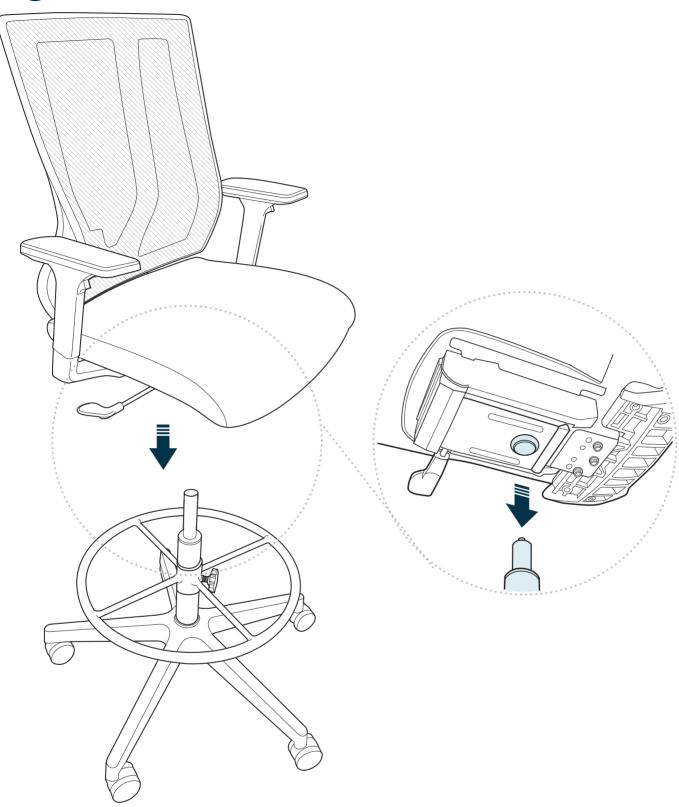

Please remove the Black or Red protective cap on the piston before proceeding. Line up the hole underneath the seat with the top of the piston and base assembly. With another person's assistance, carefully lower the chair back onto the piston. Using even pressure, press down firmly on the seat cushion a few times to ensure the seat is fully engaged with the piston.

CAUTION: Once the chair is assembled, do not attempt to disassemble the chair, as doing so could damage the product.

Drafting Chair Adjustments

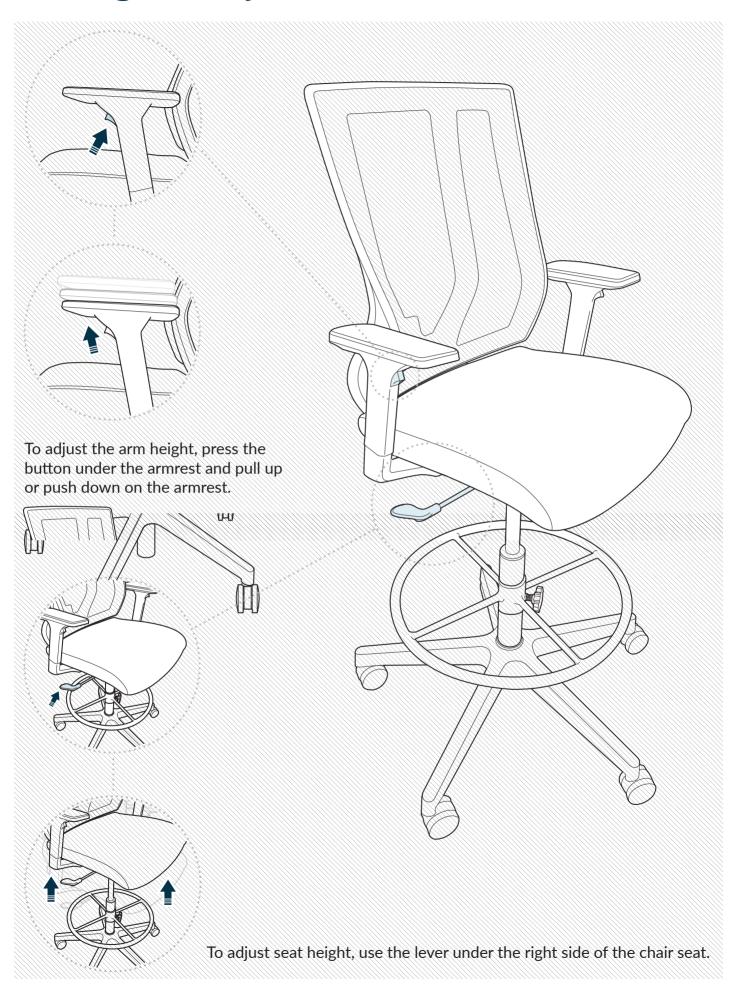





WARNING: To prevent injuries and product failure, do not use this chair for standing, climbing, or leaning. Do not use if the chair is damaged or incorrectly assembled.



(800) 207-2587